



www.cesab-forklifts.eu

Stacked Power The S010i is a Li-ion powered stacker with exceptional compactness for maximised productivity Open mast design and low body height for great driver vision

Effective ergonomics for safe and precise handling. Turtle speed for optimal manoeuvrability and safety. PIN-code for no unauthorised use, and no risk of lost keys

Easily accessible open design with less components, for higher truck availability and quicker maintenance

.........

Robust, heavy duty welded forks. Low front chassis for excellent foot protection. Low weight for use in restricted areas like elevators or mezzanine floors



Thick steel front hood that's built to last, with no fragile plastic parts

Gas spring assisted tiller arm for soft

return to

released

vertical

when




The CESAB S010i has a four wheel design and offers highest stability - lift heights up to 3,6 m



P013i: both the drive wheel and the caster wheels have safe foot protections as standard




P013i: easy longside pallet handling. Twin fork wheels as standard, for reduced pressure on floors and easier and silent travel over uneven surfaces With standard caster wheels the P013i offers a very stable platform. The rugged construction of the caster wheels and the 80 mm diameter don't fear loading boards or docks

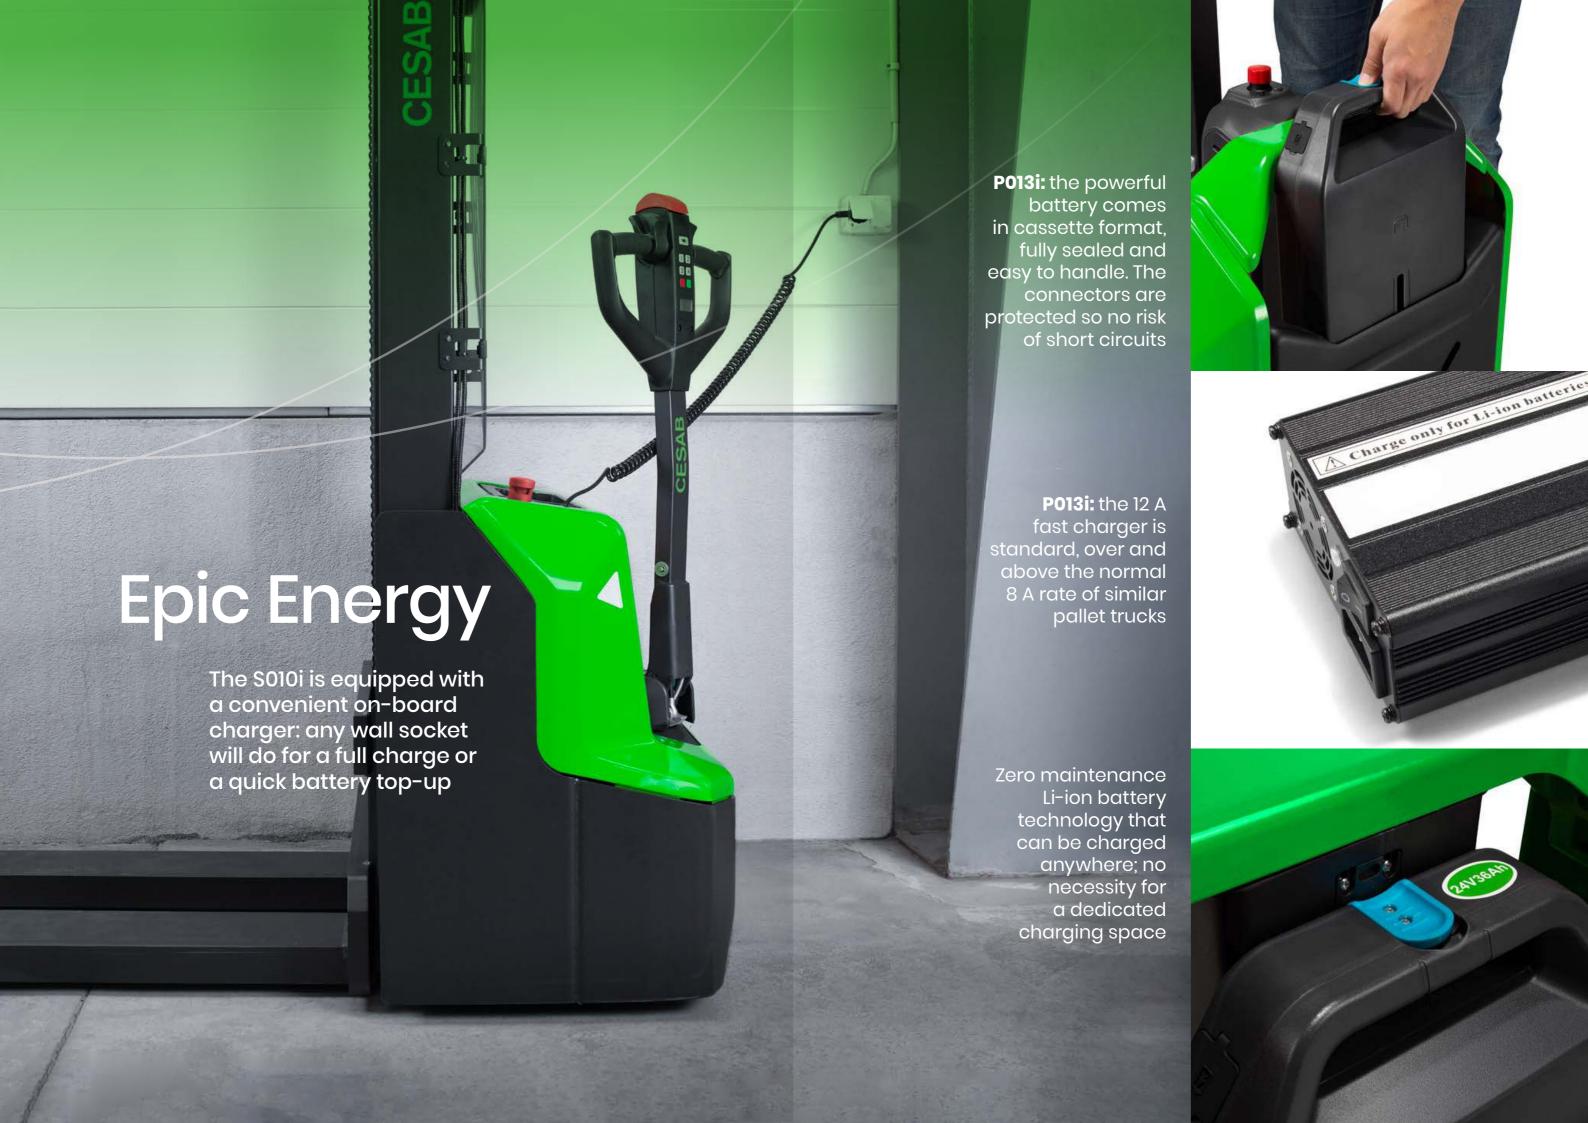



Faster drive speeds, and turtle speed when tiller arm is in vertical position

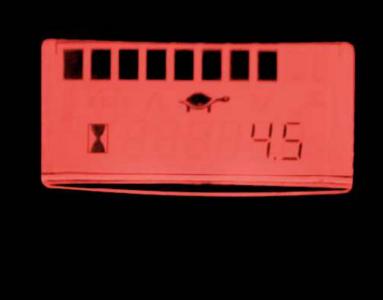

Ergonomic butterfly switches for easy driving. Separated buttons for fast lifting and lowering



Safe automatic speed reduction when cornering, included as standard in both the S010i and P013i



S010i: double USB-A ports powers terminals, tablets and phones





Compact - Perfect in confined areas



Light – Ideal on weight restricted floors



Authorised - PIN code user access



Usable – Effortless manoeuvrability



Ergonomic – Designed for easy use

Specifications

Nominal capacity Lift height Height mast lowered Height mast extended Service weight with battery Load centre Overall length Length to fork face Overall width **Turning radius** Travel speed with / without load Lift speed with / without load Drive motor rating \$2 60 min Sound level EN 12053

CESAB S010i

CESAB P013i 1000 kg 1300 kg 2900/3600 mm 195 mm 1930/2280 mm 3337/4037 mm 565/594 kg 135 kg 600 mm 600 mm 1710 mm 1530 mm 560 mm 380 mm 800 mm 540 mm 1350 mm 1330 mm 4.2/4.5 km/h 4.6 / 4.8 km/h 0.11 / 0.16 m/s 0.02/0.025 m/s 0.65 kW 0.65 kW < 70 dB(A) < 70 dB(A)

CESAB S010i and P013i

- Identical drive units shared design and parts for easier servicing
- Low weight for use in restricted areas like elevators or mezzanine floors
- 24V Li-ion battery Full charge in 2,5 hours from any wall socket
- Intuitive controls Easy to operate with left or right hand, even in confined areas
- Turtle button Creep speed for optimal manoeuvrability and safety
- Manoeuvrable Perfectly controllable due to the very wide steering angles
- Safe Automatic speed reduction while cornering, tiller arm within the truck profile
- PIN-code access no unauthorised use, no risk of lost or broken keys
- Automatic brake the upright tiller arm activates parking brake, the truck is secured
- Front chassis with low ground clearance - excellent foot protection
- LCD Display constant information on the status of the truck
- Open design Less components, easily accessible, for better truck availability
- Thick steel front hood built to last, no fragile plastics
- · Heavy duty welded forks More robust and durable than folded sheet metal
- Gas spring assisted tiller arm soft return to vertical when released
- Upright tiller arm driving in Turtle mode – easy working in tight spots

- Auto lock on slopes no roll-back, full control
- 210 mm polyurethane drive wheel with optimal grip
- Separated lift and lower buttons no unintentional load movements
- Easily accessible emergency switch - quick stop in case of emergencies
- Easily accessible horn switch - for a safe work environment

CESAB S010i

- Programmable auto shut-off saves energy, no unauthorised use
- Double USB-A port powers terminals, tablets and phones
- 4-wheel design for max stability and safety
- Open mast and low body height for perfect visibility

CESAB P013i

- Bogie fork wheels with climber wheels for entering of closed pallet
- Caster wheels with safety foot protection
- Fork marks for easy 800 mm pallet handling



www.cesab-forklifts.eu